

**182PERC- Half-cell Bifacial Module(72)**

**Product Feature**



High Power Output  
Low LCOE




Maximum Power  
up to 555W




High Reliability



Low Degradation

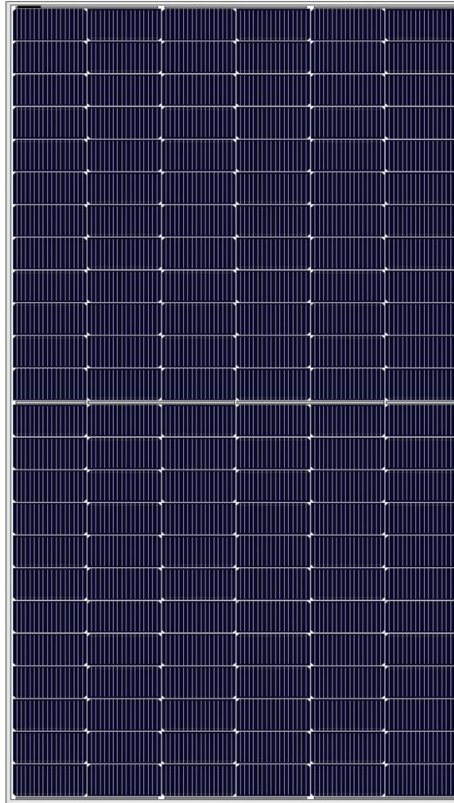

**Linear Warranty**

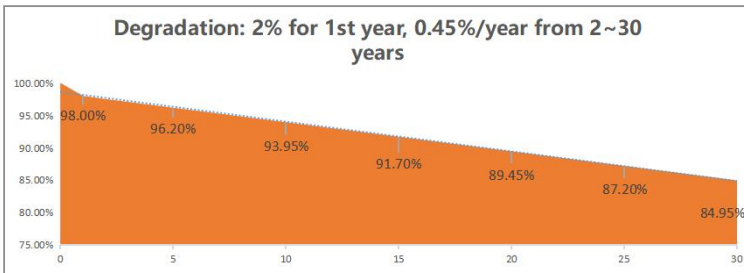

12 year Warranty for Material and Processing



30 year Warranty for Linear Power output

**Management System certification**

- ISO9001: 2015/Quality Management System
- ISO14001: 2015/Environmental Management System
- ISO45001: 2018/Occupational Health and Safety Management System

**Product certification**



### Electrical Characteristics (STC)

Module type: TWMPD-72HD\*\*\*

Maximum Power: Pmax [W]	540	545	550	555
Open Circuit Voltage: Voc [V]	49.70	49.90	50.10	50.30
Short Circuit Current: Isc [A]	13.78	13.83	13.88	13.93
Voltage at Maximum Power: Vmp [V]	41.56	41.76	41.96	42.16
Current at Maximum Power: Imp [A]	13.00	13.05	13.11	13.17
Module Efficiency: η [%]	20.9	21.1	21.3	21.5

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, AM=1.5, Test Uncertainty: ±3%

### Electrical Characteristics (NMOT)

Maximum Power: Pmax [W]	408.6	412.4	416.2	420.0
Open Circuit Voltage: Voc [V]	46.48	46.74	47.01	47.28
Short Circuit Current: Isc [A]	11.04	11.08	11.12	11.16
Voltage at Maximum Power: Vmp [V]	38.45	38.67	38.90	39.12
Current at Maximum Power: Imp [A]	10.62	10.66	10.70	10.74

NMOT: Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, AM=1.5, Wind Speed 1m/s




### Electrical characteristics with different rear side power gain

5%	Maximum Power: Pmax[W]	0.0	567.0	572.3	577.5	582.8	0.0
	Module Efficiency: η [%]	0.0	21.9	22.2	22.4	22.6	0.0
15%	Maximum Power: Pmax[W]	0.0	621.0	626.8	632.5	638.3	0.0
	Module Efficiency: η [%]	0.0	24.0	24.3	24.5	24.7	0.0
25%	Maximum Power: Pmax[W]	0.0	675.0	681.3	687.5	693.8	0.0
	Module Efficiency: η [%]	0.0	26.1	26.4	26.6	26.9	0.0

### Mechanical Parameters

Cell Type	P-PERC
Cell Orientation	144[6×24]
Dimensions	2278±2×1134±2×30mm
Weight	32.7 kg
Front Glass	2.0 mm AR coated heat strengthened glass
Rear Glass	2.0 mm heat strengthened glass
Frame	Anodized aluminum alloy frame
Junction Box	IP68, 3 diodes
Cable	4.0 mm <sup>2</sup>
Cable length	Positive: 400mm, Negative: 200mm,length can be customized
Wind/Snow load	2400Pa/5400Pa
Per pallet	36 pcs
Packaging	720 pcs per 40'HC
Fire class rating	Class C

### Drawing(Unit:mm)

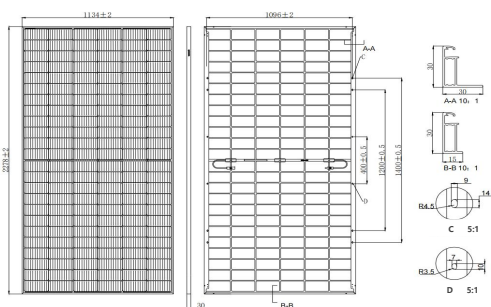

**Statement:** With technological process and product update, there maybe deviation between the technical parameters of Tongwei's module products and the technical parameters contained in the specification, and Tongwei Solar has the right to adjust the technical parameters at any time without notifying the customer, the final interpretation of the technical specification is vested in Tongwei Solar.

Tongwei Solar (Hefei) Co., Ltd, Email: sales@tongwei.com, Web: www.tw-solar.com

Address: No.888, Changning Road, High-tech District, Hefei City, Anhui Province, 230088, P.R. China

### Temperature rating

Temperature Coefficient of Pmax	-0.34%/°C
Temperature Coefficient of Voc	-0.28%/°C
Temperature Coefficient of Isc	+0.05%/°C
NMOT	45±2°C

### Operating Parameters

Operating Temperature Maximum	-40°C~+85°C
System Voltage Maximum Series Fuse Rating	1500V DC 30A
Power Output Tolerance	0~+5W
Bifaciality	70±5%

## **Cable type**

---

Zhejiang Renhe Photovoltaic Technology Co., Ltd.  
Zhejiang Zhonghuan Sunter PV Technology Co., Ltd.  
Zhejiang Jiaming Tianheyuan Photovoltaics Technology Co., Ltd  
Ningbo Kibor Wire&Cable Co., Ltd.  
Wuxi Xinhongye Wire&Cable Co., Ltd.  
Trina Solar Co., Ltd.  
Changshu JHOSIN Communication Technology Co., Ltd.  
SUZHOU YONGHAO CABLE CO LTD  
QC Solar (Suzhou) Corporation  
Suzhou Baohing Electric Wire & Cable Manufacturer Co., Ltd.  
Jiangxi Jinko PV Material Co., Ltd.  
Jiangxi Hejia Technology Co., Ltd.  
YushanXinzhan Industrial Co., Ltd.  
DONGGUAN XINBEISEN WIRE AND CABLE CO LTD  
Jiangxi Han Guang Cable Co., Ltd.  
RUIXU INDUSTRY CO., LTD.  
Suzhou Xietong Photovoltaic Technology Co., Ltd.  
Jiangsu Tongling Electric Co., Ltd.

## **Connector type**

---

05-8, Zhejiang Renhe Photovoltaic Technology Co., Ltd.  
PV-KST4-EVO2/xy\_UR , PV-KBT4-EVO2/xy\_UR, Stäubli Electrical Connectors AG  
PV-KST4-EVO2A/xy, PV-KBT4-EVO2A/xy, Stäubli Electrical Connectors AG  
UTXCFabcd, UTXCMabcd, Amphenol Technology (Shenzhen) Co., Ltd.  
RHC2xyzu, Zhejiang Renhe Photovoltaic Technology Co., Ltd.  
PV-JM608, Zhejiang Jiaming Tianheyuan Photovoltaics Technology Co., Ltd.  
PV-JM601A, Zhejiang Jiaming Tianheyuan Photovoltaics Technology Co., Ltd.  
PV4-S1yx, Tyco Electronics (Shanghai) Co., Ltd.  
HQC4, Hanwha Q CELLS (Qidong) Co., Ltd  
PV-CO02-xy, SUZHOU UKT NEW ENERGY TECHNOLOGY CO., LTD  
TS4-xz , Trina Solar Co., Ltd.  
TS4, Trina Solar Co., Ltd.  
H4Cabcdef, Amphenol Technology (Shenzhen) Co., Ltd.  
PV-CF-C-2, 5-4-SETxxxx, PV-CM-C-2, 5-4-SETxxxx, Phoenix Contact GmbH & Co.KG  
PV-ZH202B, Zhejiang Zhonghuan Sunter PV Technology Co., Ltd.  
QC4.10-cds, QC Solar (Suzhou) Corporation  
PV-MH5, Ningbo Minghe New Energy Technology Co., Ltd.  
TL-CABLE01S-F, TL-CABLE01S, Jiangsu Tongling Electric Co., Ltd.  
PV-KST4-EVO 2A/xy\_UR; PV-KBT4-EVO 2A/xy\_UR, Stäubli Electrical Connectors AG  
PV-XT101.1, Suzhou Xietong Photovoltaic Technology Co., Ltd.  
PV-JK03M-2, PV-JK03M/xy, PV-JK03M1/xy, PV-JK03M2/xy, Jiangxi Jinko PV Material Co., Ltd.  
UTXCFabcde, UTXCMabcde, Amphenol Technology (Shenzhen) Co., Ltd.  
TW-PVCON-01, Tongwei Solar (Hefei) Co., Ltd.